


MINI LIGHTHEAD Manual

Surface Mount

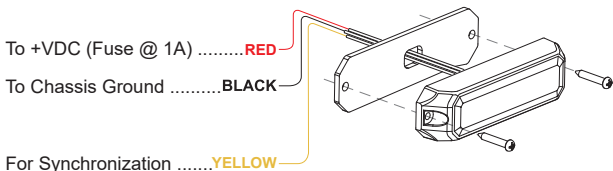

Connect **YELLOW** wires of multiple lighthead together for synchronization
(All lighthead should be set at the same Flash Pattern)

For Simultaneous or Alternating Flash:

1. Apply +VDC to **RED** and **YELLOW** wires simultaneously to enter Grouping mode; lighthead will display short (single or double) flash:
 - Single flash = Group1 · Double flash = Group2
2. Remove **YELLOW** wire from +VDC then momentarily apply +VDC to change Groups:
 - Lighthead of the same Group will flash together.
 - Lighthead of the different Group will flash alternately.

For Flash Patterns:

Momentarily apply +VDC to **YELLOW** wire:

- once for next pattern
- quick three times for pattern 1


NOTE: This unit may not be factory set at FP# 1.

FP#	Flash Patterns		
1	Random	7	Quad
2	Steady	8	Quint
3	Single	9	8 Flash
4	Mega	10	Single-Quad
5	Double	11	Single H/L
6	Triple	12	Single-Triple-Quint

Adhesive Mount


1. Select a mounting location and clean the surface.
2. Peel one side of the adhesive and apply to the lighthouse base.
3. Peel the other side of the adhesive and secure the lighthouse firmly to the surface.

NOTE: Optimum adhesive strength is achieved after 24hrs.



Screw Mount

1. Select a mounting location for the lighthouse.
2. Mark and drill mounting holes.
3. Place the rubber pad to the bottom of the base.
4. Secure the lighthouse to the mounting surface with supplied screws.



Bracket Mount

1. Select a mounting location for the lighthouse.
2. Place the rubber pad to the bottom of the base.
3. Place the lighthouse to the mounting surface.
4. Align top holes of the bracket onto the lighthouse base alignment points.
5. Secure the lighthouse with supplied screws from the bottom of the bracket.

