


Linear White Lights

The following is a list of recommended practices for the installation and operation of your product.

FAILURE TO FOLLOW THESE SAFETY PRECAUTIONS AND INSTRUCTIONS COULD RESULT IN DAMAGE TO THE PRODUCT OR VEHICLE AND/OR SERIOUS INJURY AND/OR DEATH TO YOU AND YOUR PASSENGERS

- Proper installation of this product requires the installer to have a good understanding of automotive electronics, systems and procedures. You may need to consult a professional for installation.
- SWS Warning Lights Inc. recommends the use of waterproof butt splices and/or connectors for all electrical connections. It is recommended that the use of good dielectric grease be used on all connections where possible.
- If mounting this product requires drilling holes, the installer must be sure that no vehicle components or other vital parts could be damaged by the drilling process. Also de-burr the holes and remove any metal shards or remnants. Grommets are recommended for all wire holes.
- Do not mount the light close to antennae or radio equipment, as they may cause electromagnetic interference. After installation of the light, it is necessary to test all electronic equipment simultaneously to ensure that they operate free of interference from other components within the vehicle.
- Never power emergency warning equipment from the same circuit or share the same grounding circuit with radio communication equipment.
- Do not install this product or route any wires in the deployment area of your air bag or areas that interfere with the operation of the vehicle. Refer to your vehicle owner's manual for the air bag deployment area and recommended mounting areas for warning lights and other equipment.
- Do not attempt to activate or control the device with the vehicle in motion or in a hazardous driving environment. The vehicle should be stopped and in park before control of the light is attempted.
- Always be aware of the pattern and its effect on traffic when activating the Traffic Directing Device.
- Do not stare directly into these lights. Momentary blindness and/or eye damage could result.
- Use only soap and water to clean the product. Use of other chemicals could result in degradation and discolouration of the lens/dome.
- Do not use a pressure washer to clean this product.
- Inspect and operate this product regularly to confirm its proper operation and mounting condition.
- It is recommended that these instructions be stored in a safe place and referred to when performing maintenance and/or reinstallation of this product.
- SWS endeavors to maintain installation instructions for its products according to the latest requirements of vehicle manufacturers. SWS cannot guarantee, and shall not be held liable for, changes or updates a vehicle manufacturer may make which render SWS's products inoperable or otherwise.
- SWS Warning Lights Inc. and its subsidiaries are not responsible for any damages due to improperly mounted or improperly wired lighting equipment.

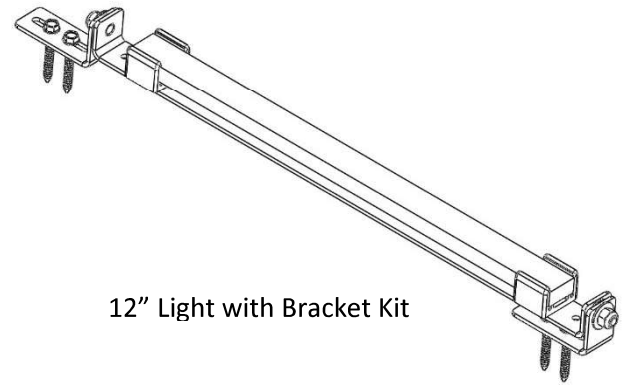

12" Light with Bracket Kit

Linear White Lights


Description

- The Linear White Lights are available in three lengths. They are available in 12" long, 20.5" long, and a 40.5" versions. Mounting bracket kits are available for the lights as well. See chart below for SWS Part Numbers.


Length	Light Part Number	Bracket Kit	Light with Bracket
12"	93791	98091	93796
20.5"	93792	98092	93795
40.5"	93793	98093	93794

Mounting Bracket Installation

1. Each light will ship with mounting clips and hardware for the clips. Mounting brackets will include two swivel end brackets, a center bracket and hardware.
2. Attach the mounting clips to the center mounting bracket as shown in the sketches.
3. Swivel brackets can be mounted to the center bracket using the supplied hardware. The swivel brackets can be mounted in either configuration, also shown in the sketch to the right.
4. Attach the swivel brackets to the desired mounting surface using your chosen configuration.
5. Tighten the hardware, and adjust the light to the desired angle.
6. Note: older versions of the lights included different end brackets for the lights. Mounting clips included with lights are now as shown in the sketch.

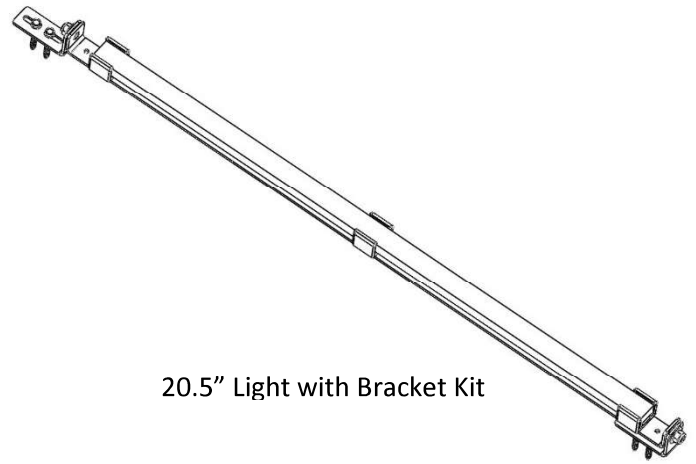

20.5" Light with Bracket Kit

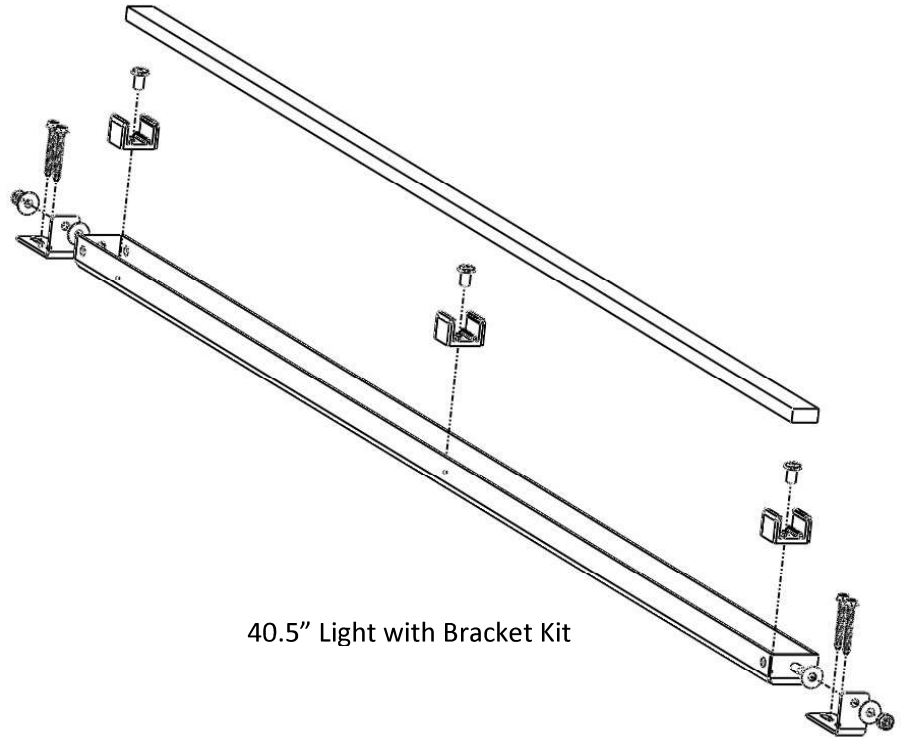

40.5" Light with Bracket Kit

Troubleshooting

If your light fails to work, please follow these troubleshooting tips before calling the factory:

- Ensure that the light is getting power and is properly grounded.
- Check for loose strands of wire at the connector.
- Check to see if the fuse has blown within the vehicle. If it has, replace with a fuse of the exact same amp rating.
- For long power wire lengths, ensure the voltage at the light connection is adequate. If not, you may have to shorten the length or increase the wire gauge.
- Ensure vehicle's battery is charged and that the charging system is functional.

CALL SWS Warning Lights Inc. (1-877-357-0222) FOR FURTHER ASSISTANCE