

Installation Guide: MiniBar Magnet/Suction with Cigar Plug

A. Connect Cigar Plug to MiniBar

Step 1: Get Ready

Disassemble the connector.

Unscrew all parts of the connector assembly so you have the individual pieces ready, as shown in **Figure 1**.



✂ **Tool Needed:** Small Phillips (cross-head) screwdriver.

Step 2: Slide Parts onto Cables

Thread the nuts.

Slide the Outer Nut followed by the Inner Sealing Nut onto both the device cable and the extension cable (Refer to Figure 2 for the correct order).



Step 3: Connect the Wires

Match the colors.

1. Loosen the 6 small screws in the center connector (unscrew about 1/3 of the way).


2. Insert the colored wires into their matching slots (See Figure 3):

Black Wire → Connect to terminal "N"

Yellow Wire → Connect to terminal "⏏" (Ground)

Red Wire → Connect to terminal "L"

3. Tighten the screws firmly onto the copper core (not the rubber insulation!).

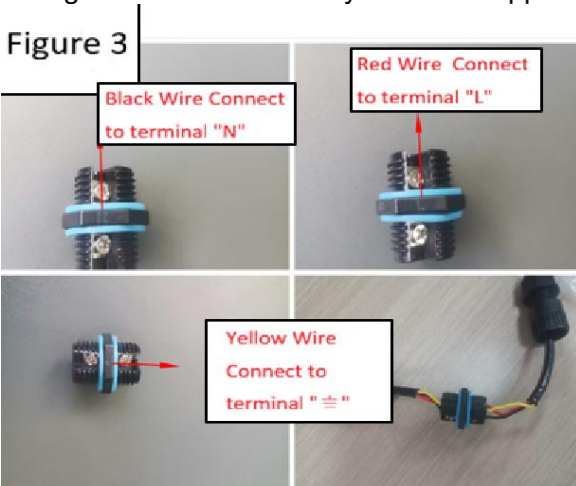

Step 4: Quick Test


Power on and check.

Before final sealing, plug in the device to make sure it lights up or functions correctly. This ensures your wiring is solid!

Step 5: Seal for Waterproofing

Lock it down (Figure 4).

1. Hold the center piece still.
2. Tighten the Inner Sealing Nut first.
3. Tighten the Outer Nut last.

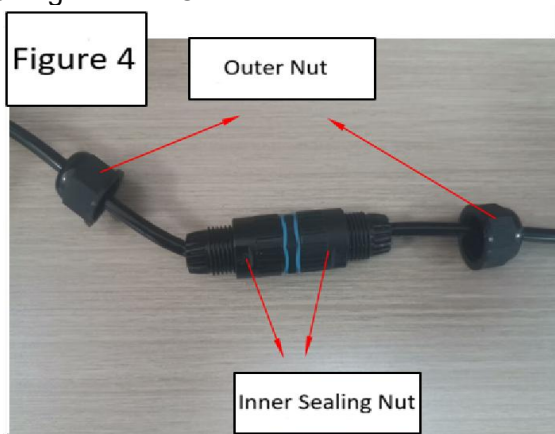

💡 Pro Tip: Make sure the cable's outer rubber jacket is pushed inside the nut to keep water out!

💡 Pro Tip: Any unused wires shall be cut flush with the cable jacket and properly sealed using waterproof tape to ensure adequate protection.

☑ Final Check

Give the product one last test to ensure everything is working perfectly after tightening. You're all set!

B. Secure the Bracket to the MiniBar

Please refer to Figure 5 for instructions on securing the bracket to the MiniBar using the disposable wrench included in the hardware kit.

